

The R&T Review

Call Free 0508 222 999 (AKLD)
Call Free 0508 333 111 (CHCH)


Sound Barrier Decidamp

Designed to reduce structural vibration and sound transmission within light gauge materials. Decidamp CLD PRO was developed to meet market noise reduction requirements in the automotive, industrial and OEM markets.

Easy to install, high tack self-adhesive backing. Remains flexible and does not become brittle. Resistant to weather and UV light.

500mm x 1000mm x 1.5mm

AMAPRO

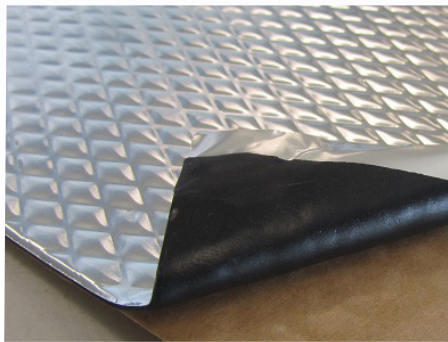


Sorber Barrier AGC Noise Insulation

Ideal for coach or boat engine compartment lining. Combines the benefits of a high performance flexible noise barrier and acoustic foam to achieve maximum noise reduction from an enclosure. Offers 45% more perceivable noise reduction than plain foam.

Moisture proof, dust proof and chemical resistant.

1m x 1.3m x 32mm Sheet

AMABW4

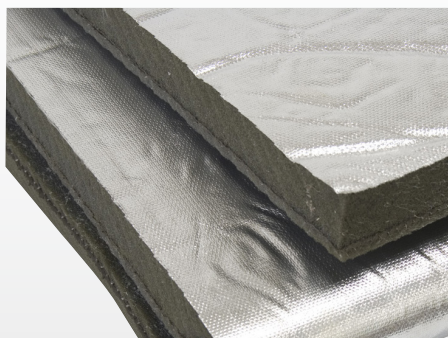

Hog Rings

Used for attaching vinyl or fabric to a seat frame. Low Carbon Steel, not plated. 20mm x 2mm 2.27kg Box

HOGR02



Hog Ring Pliers

Straight 1440-AC With Closing Spring

TLHGXX



Bradmill Superstop 12oz

In addition to the high tear strength, the canvas has an XLP finish, which imparts excellent water and rot proofing properties.

Features high tenacity corespun yarns in groups of three that are genuinely Ripstop® woven over a polyester cotton blended body structure.

CVBSS12DGR - Dark Green



4 Way Stretch Black Vinyl

A vinyl with a **true 4 way stretch**. Stretches and recovers up and across the roll as well as diagonally.

LCD4BK





For the Big Job or the Small Job we have the Polyester Webbing

50M ROLLS

General purpose polyester medium weight high-tenacity webbing used for shade sails, handles, tie downs and sail covers.

Width	19mm	25mm	38mm	50mm
Tensile Strength	750kg	950kg	1450kg	1900kg

19mm Black WEPTYGP19BK
 25mm Black WEPTYGP25BK
 38mm Black WEPTYGP38BK
 50mm Black WEPTYGP50BK

25mm White WEPTYGP25WT
 38mm White WEPTYGP38WT
 50mm White WEPTYGP50WT



A heavy duty polyester webbing manufactured for applications where extra strength is required - such as shade sails. Tensile strength average 1800 kgs.

25mm Black WEPTYH25BK



Medium weight polyester Webbing.

The tow yarn construction provides a better grip on buckles. 600 kg tensile strength

25mm Black WEWPYP25BK

100% polyester **seatbelt style webbing** suitable for shade sail reinforcement and general webbing application. Break Strength 1000kg

25mm Black WEWPYSB25BK
 38mm Black WEWPYSB38BK
 50mm Black WEWPYSB50BK

25mm White WEWPYSB25WT
 50mm Charcoal WEWPYSB50CC



Cambuckle 25mm Cast ZP

Zinc plated cambuckle used to secure 25mm webbing. While pressing the thumb release, pull the webbing to your desired length, then release. The teeth grip the webbing to stop any movement. Suitable for trailer covers, roof racks and many other light to medium duty applications.

BKCLM25



15L Hand Wash Unit

Very well designed and economical hand wash unit for service vehicles, chemicals handling equipment, horsefloats and farm equipment. Soap dispenser is attached to the tank. 25mm tap thread.

Replacement soap dispensers also sold.- WTHW15SD

WTHW15

