



Industrial
& Transport
Engineering
Supplies



Call Free 0508 222 999 (AKLD) 0508 333 111 (CHCH)
www.retwine.co.nz

April 2024

Cast Stainless Steel Hinge

- » 316 Grade stainless steel cast hinge, polished
- » Countersunk holes
- » 270 degree opening
- » 83mm long x 65mm wide x 3mm thick

HGSS300



NEW
PRODUCT

Door Hinge

- » Medium pressed stainless steel hinge
- » 316 grade stainless steel complete with grease nipple
- » Designed for 180 degree opening but will rotate 270 degree, flat blades
- » 146.5mm x 65mm (plus grease nipple) x 4mm, sits 17mm high

HGSS2216



Gas Stay Range 320mm

- » Opened length 320mm
- » Stroke 125mm
- » 8mm shaft and 18mm cylinder
- » Available pre-loaded in the following Newton strengths
- » 100N, 150N, 200N, 250N, 300N, 350N, 400N
- » All our gas stays carry 2yr manufacturer's warranty

GASS320_ _ _



Proudly New Zealand owned since 1924

IndustriLås

Vector 3 T-Handle

- » 12V, keyed alike, Locking & Unlocking - no feedback signal
- » Rear fixing mounts
- » Black handle
- » Dust cover for barrel
- » 180 degree adjustable single point roller cam
- » IP65, universal left and right
- » 4mm compression when handle closes


LKV3BK1PT



Extruded Continuous Hinge

- » Black, 1.6m length
- » Construction: Co-extruded rigid PVC profiles, fused with molten hinge membrane
- » Paintable rigid portions
- » 165 degree opening
- » Easy to fit. Corrosion resistant. U.V. light stabilized. Excellent flex life
- » Horizontal use only

HGLOCF16



Industrial
& Transport
Engineering
Supplies

Auckland: 7 Arthur Brown Place, Mt Wellington 1060 • PO Box 11 2230, Penrose, Auckland 1642
Christchurch: 15 Watts Road, Sockburn 8042 • PO Box 11 132, Sockburn, Christchurch 8443

Amarillo Drivers Seat MSG90.3P

- » Air Suspension Seat
- » Backrest Adjustable
- » Air Lumbar Support
- » Height Adjustment
- » Shock Absorber Lockable
- » Seat Angle Adjustment
- » Seat Slide Adjustable 210mm
- » Seatpan Adjustable 60mm.
- » Weight up to 130kgs.
- » GRAMMER part number 137153
- » Unupholstered



STGMSG903



Tool Box Powder Coated Angle Front

- » 600mm L x 500 x 500mm
- » Quality black powder coated 1.5mm mild steel truck or ute toolbox.
- » Robust stylish drop tee lock with dust cover for the key lock fitted to bevel edged door.
- » Gas stays are fitted to the lid to hold up while loading.
- » Door sealed for protection from dust and moisture.

TBPCAF600




CentaFlow Rotary Ventilator

Sleek and modern, this low profile venturi rotary vent is functional and looks good, available in Black and White.

Pre-assembled slimline ventilator equipped with internal adjustment panel & vent plate

- » 60mm (h) x 220mm (w) 80mm cutout
- » 304 Stainless Steel spindle and bearings
- » ABS Plastic
- » Integrated neoprene sealing gasket
- » Suits roof thicknesses 1 - 17mm

Black VTS111BK
White VTS222WT

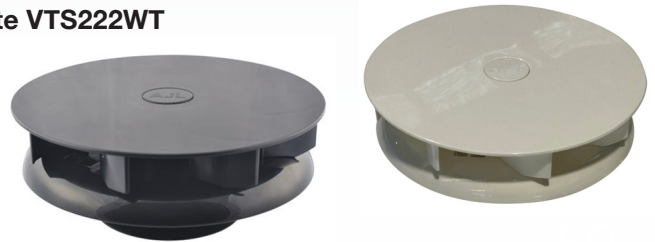

Rotary Vent Plastic White

- » Venturi vent. Draws air out
- » Stainless steel centre shaft and high grade plastic makes this corrosive and impact resistant
- » Mounting Flange - 140mm. Cut Out Size - 97mm
- » Protrusion from Roof - 125mm
- » Diameter 240mm overall

VTS500P



Exterior Muller Vent White

- » Venturi Extraction Action
- » 285 mm x 190 mm. Inside Hole: 130 mm x 140 mm
- » Protrusion from Roof: 55mm

VTSZ203



Call Free
0508 222 999 (AKLD) 0508 333 111 (CHCH)



*Specials are until 30 April 2024 and whilst stocks last. Prices are Trade and ex warehouses and are exclusive of GST.

www.retwine.co.nz