



Proudly New Zealand owned since 1924

## Industrilås

### Vector Drop T Handle

- » Vector t Handle, rear fixing cast in stud mounts
- » Black Handle
- » Zinc steel shaft with 180 degree adjustable three point roller cam
- » Lockable with an extra pad lock loop feature
- » PUR Seal and cylinder dust cover
- » Protection degree IP65

**NEW  
VERSION  
LANDED**

LKVECTR3BK



### Compression Latch

- » Latch is sealed against water and dust rated to IP65.
- » Adjustable grip range 11 - 28mm.
- » Suitable for panel/door thickness up to 7mm.
- » Cut out size is 90mm x 35mm.
- » Housing made from Glass reinforced polyamide (PA6).

LKCLIBK



### Step Ladders

- » All have slide out platform with safety yellow powder coated steps.
- » Safe working load 130KG's.
- » EZP – Zinc Plated.



1 Step

- » Closed 423mm wide x 381mm deep x 61.5mm thick (112.5mm with handle).

- » Step height from platform 365mm at a 65Deg angle

**LADP1**

2 Step

- » Closed 423mm wide x 665.6mm deep x 61.5mm thick (112.5mm with handle).

- » Step height from platform 650mm at a 65Deg angle.


**LADP2**

3 Step

- » Closed 423mm wide x 765.6mm deep x 61.5mm thick (112.5mm with handle).

- » Step height from platform 749mm at a 65Deg angle.

**LADP3**




**Gerflor**

## Tarabus Palladium Helios Flooring

- » Plasticised compact PVC, stabilised with a glass fibre web
- » Anti slip mineral particles and PVC particles on the surface. R10 slip resistance DIN51130
- » 2m wide. 2.25mm thick. 2.2kgs per sqm
- » Fire resistant and chemical resistant
- » Sold in cut lengths or 24m rolls

### MGGTHELPAL

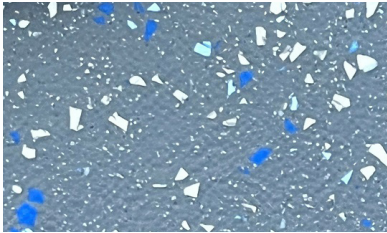

- » Weld Rod Round CR50
- » Matches Palladium 8805 flooring

### MGGTHELPALWR



**HAPPICH**  
A Pelzer Family Company

## Bus Bells

- » Bus hard wired type
- » Rail Mount 38mm wide x 110mm long **BEPRY**
- » Wall Mount 38mm wide x 80mm long **BEPWY**



**redflag**<sup>TM</sup>

## Double Door Toolbox

- » Quality black powder coated 1.5mm mild steel truck or ute toolbox with Stainless Steel doors
- » Two robust stainless steel drop tee locks
- » Suit truck underdeck
- » Lanyard fitted to stop doors opening past 150deg. Doors sealed for protection from dust and moisture

### TBPCSSDD1200



## Lashing Ring Stainless Steel

- » Lightweight lashing ring with plastic base
- » Base made from black polypropylene
- » 12.6mm thick x 103mm diameter
- » 10.3mm bolt hole for mounting
- » SWL 362kgs
- » Stainless steel ring and clamp

### RPLRRBSS



## Hinged Spring Lid Vent

- » Hinged Spring Lid Vent Large
- » Aluminium frame with seal
- » Black polycoat pressed steel top
- » Cut Out Dimensions 279mm x 203mm
- » Overall size 337mm x 261mm
- » Opens 25deg

### VTJSL2



Call Free

**0508 222 999** (AKLD) **0508 333 111** (CHCH)

**REID & TWINAME**  
IMPORTERS & DISTRIBUTORS

\*Specials are until 31 July 2024 and whilst stocks last. Prices are Trade and ex warehouses and are exclusive of GST.

[www.retwine.co.nz](http://www.retwine.co.nz)