



Industrial
& Transport
Engineering
Supplies



A DIVISION OF

Call Free 0508 222 999 (AKLD) 0508 333 111 (CHCH)
www.retwine.co.nz

May 2025

Small Rubber Buffer

NEW

- » Light duty Buffer block, synthetic rubber.
- » 126mm long, 41mm wide 43.5mm high.
- » Hole centres 65mm

BUBFS



Pressed Steel Hinge Heavy Duty Zinc Plated 5mm

- » Zinc Coated Mild Steel.
- » Supplied assembled (with bracket and bolt)
- » Suited to 100mm pillar applications.

HG60012



Door Retainer Set Stainless Steel

- » Stainless steel door holder.
- » Arm Length: 90 mm.
- » Spring loaded catch plate, comes as a set complete with 2 pvc base plates.
- » Catch base 60mm wide, 65mm long. Strike base 60mm wide, 80mm long

»

CTSSDR



Spring Loaded Folding Access Step

- » A black steel, spring loaded folding access step, with a diamond grip pattern on wide tread step.
- » 120mm x 108mm wide.
- » Mild Steel with black E-cote finish

LADSTEP



Rear Door Lock Set 27mm Bushed D Handle

- » 27mm zinc plated rear door lock set with dee handle.
- » Bushed saddles.
- » Ideally pair with HG60012 or HG12471ZP hinges. Truck door lock, box body door lock, container or cam lock set 27mm.


»

LKCD27B



Tarabus Helios NT Flooring

- » Anti slip mineral particles and PVC particles on the surface
- » R10 slip resistance DIN51130
- » 2m wide. Roll length 24m standard
- » 2.25mm thick and 2.2kgs per sqm
- » Fire resistant and chemical resistant

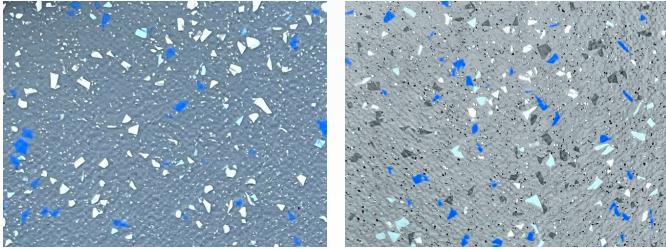

MGGTHELPAL
Palladium

MGGTHELSEL
Selenium



Tool Box Powder Coated Box with Stainless Steel Lid

- » Quality black powder coated steel body with polished stainless steel lid.
- » Robust stylish drop tee lock with dust cover for the key lock.
- » Suit vehicle underdeck or behind vehicle cab.
- » Size 300mm L x 500mm H x 500mm D.
- » Doors sealed for protection from dust and moisture.

TBPCSS300



CLEARANCE SPECIALS

Roof Vent



- » Low profile Electric roof vent (59mm). High flow 250m³/h but only 47dB. 12v 15w. Cut Out 202mm. Overall 305mm x 310mm.

VTERV



Underseat Heater 24V

- » 2.9kg, 3400 Kcal/h. 170 m³/h air flow. 7.5L/Min water flow.
- » Tubular aluminium radiator.
- » 13mm dia inlet/outlet pipes.
- » 4,000 hour motor life (approx ½ full speed).
- » Tubular core.
- » Thermic and amperometric motor protection.

HE9006



Vehicle Mirror Right Hand - VM 130 Series

- » 2 piece with flat and convex sections.
- » 427mm x 200mm.
- » 16mm to 19mm standard clamp.
- » Common in city bus market. Made to ADR

MRVM130RH



Call Free

0508 222 999 (AKLD) **0508 333 111** (CHCH)

