



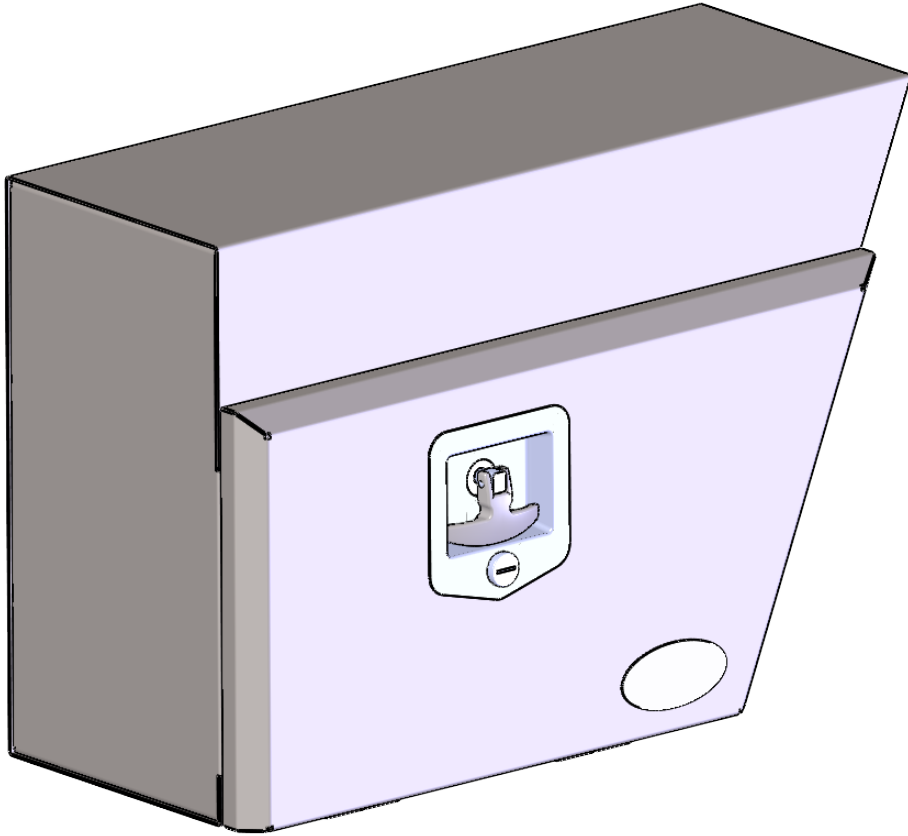


REVISIONS			
PRO REV.	DATE.	ALTERATION.	AUTH
0	14-09-2016	AS PER CLIENT'S REQUEST	V1422
	31-12-2019	DUR 19-0064: Gap cut of Part 1,2,3.	V1422
	14-05-2021	As Per Dur 20-0148 [Converting drainage hole drilling to laser cutting]	V2885
		As Per Dur 20-0069 [Add adhesive info for stainless steel label]	

MO:	Batch: 1 of 1	Product Description: Reid & Twiname Beveled Lid Wheel Arch Steel Tool Box 314 LID L600top-440botxH400xD250 LH				0	14-05-2021	As Per Dur 20-0069 [Add adhesive info for stainless steel label]					V2885						
Quantity Batch:		Product Code: 001-001-0009LHNZ				PRO REV.		DATE		ALTERATION					AUTH.				
Contract #:		Dwg Description: REVSIONS TABLE				Selection		0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	>4000-8000	Angle Tolerance		
Contract Ref:		Client: REID & TWINAME		Client Code: TBPCWALH				±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	±0.8	-	±1°		
Approved By:		Client Dwg Ref: TBPCWALH		Client Rev: 0				±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3			
Signature by:		Date:		Fisnish: Black /Smooth/Matt 25+-5/RAL 9005				➡		±0.15	±0.2	±0.5	±0.8	±1.2	±2	±3		±4	±5
										NOTE: All dimensions in mm (unless noted otherwise)					W : 13.02 (kg)		Sheet 1 of 3		

List of Part							
Part #	Code	Description	Material Spec	Size	Qty.	Unit	Total
1	901-040-0030-2	1.5mm thk Hot Rolled Steel Sheet Cut To Size	CT 3 (250 Mpa)	1076x600x1.5mm	1	M2	0.6456
2	901-040-0030-2	1.5mm thk Hot Rolled Steel Sheet Cut To Size	CT 3 (250 Mpa)	420x295x1.5mm	1	M2	0.1239
3	901-040-0030-2	1.5mm thk Hot Rolled Steel Sheet Cut To Size	CT 3 (250 Mpa)	451x295x1.5mm	1	M2	0.1330
4	901-040-0030-2	1.5mm thk Hot Rolled Steel Sheet Cut To Size	CT 3 (250 Mpa)	627x356x1.5mm	1	M2	0.2232
List of Assembly							
AS1	SFP-010-0151	Barrel Hinge Male Part (Steel) Weld on	CT 3 (250 Mpa)	-	2	Pcs	2
AS2	SFP-010-0150	Barrel Hinge Female Part (Steel) Weld on	CT 3 (250 Mpa)	-	2	Pcs	2
AS3	SFP-010-0001	Tool Box (Steel) - Lanyard Bracket : Lid	CT 3 (250 Mpa)	40x40x3mm	1	Pcs	1
AS4	SFP-010-0002	Tool Box (Steel) - Lanyard Bracket - Body	CT 3 (250 Mpa)	40x20x3mm	1	Pcs	1
AS5	SFP-010-0050	Tool Box Corner Flange (Steel) 40x20x1.5mm	CT 3 (250 Mpa)	40x20x1.5mm	4	Pcs	4
List of Packing							
AC-02	915-006-0002	T-Paddle handle lock "Edge Style" (T-latch 50052) c/w Gasket & Key	Stainless Steel Grade 304	-	1	Pcs	1
AC-03	915-008-0000	Rubber Dust Proof Seal , 8mm dia rubber seal Plastic pinch type (Use Lenght 1250mm)	Rubber	1250mm	1	Pcs	1
AC-05	915-009-0005	8mm dia Black Plastic Heat Shrink (Use Lenght 310mm)	Plastic	310mm	1	Pcs	1
AC-06	915-013-0000	Stainless Steel chain 20mm x 8mm x 2mm (Use Lenght 330mm)	Stainless Steel	-	1	Pcs	1
AC-07	914-098-0004	Stainless steel washer to suit M4 OD 10mm x 1mm	Stainless steel	-	4	Pcs	4
AC-08	914-016-0990	Hex socket (allen Key) & Domed Head bolt M4 x 15mm L x 0.7 pitch	Stainless Steel	-	2	Pcs	2
AC-09	914-047-0009	Nyloc Nut : M4 x pitch 0.7 Stainless Steel	Stainless Steel	-	2	Pcs	2
AC-16	915-060-0000	M6 grease nipple	Steel	-	2	Pcs	2
AC-17	914-096-0010	Flat Washer M6 x 6.1mmID x 12mmOD x 1mmT	Brass	-	2	Pcs	2
AC18	919-100-0110	Warning Lable "Lid not to be used as a shelf "	-	-	1	Pcs	1
BOX	N/A	Card board Box 610Lx265Wx410H "RED FLAG Logo with www.retwine.co.nz" : 600x250x400 Wheel Arch 3/4 Lid Tool Box	Girl/Boy: 3 ply	-	1	Pcs	1
LB	919-100-0050	"RED FLAG Logo with www.retwine.co.nz"-Oval-shaped Label,90mmL x 45mmH	S/Steel 304	-	1	Pcs	1

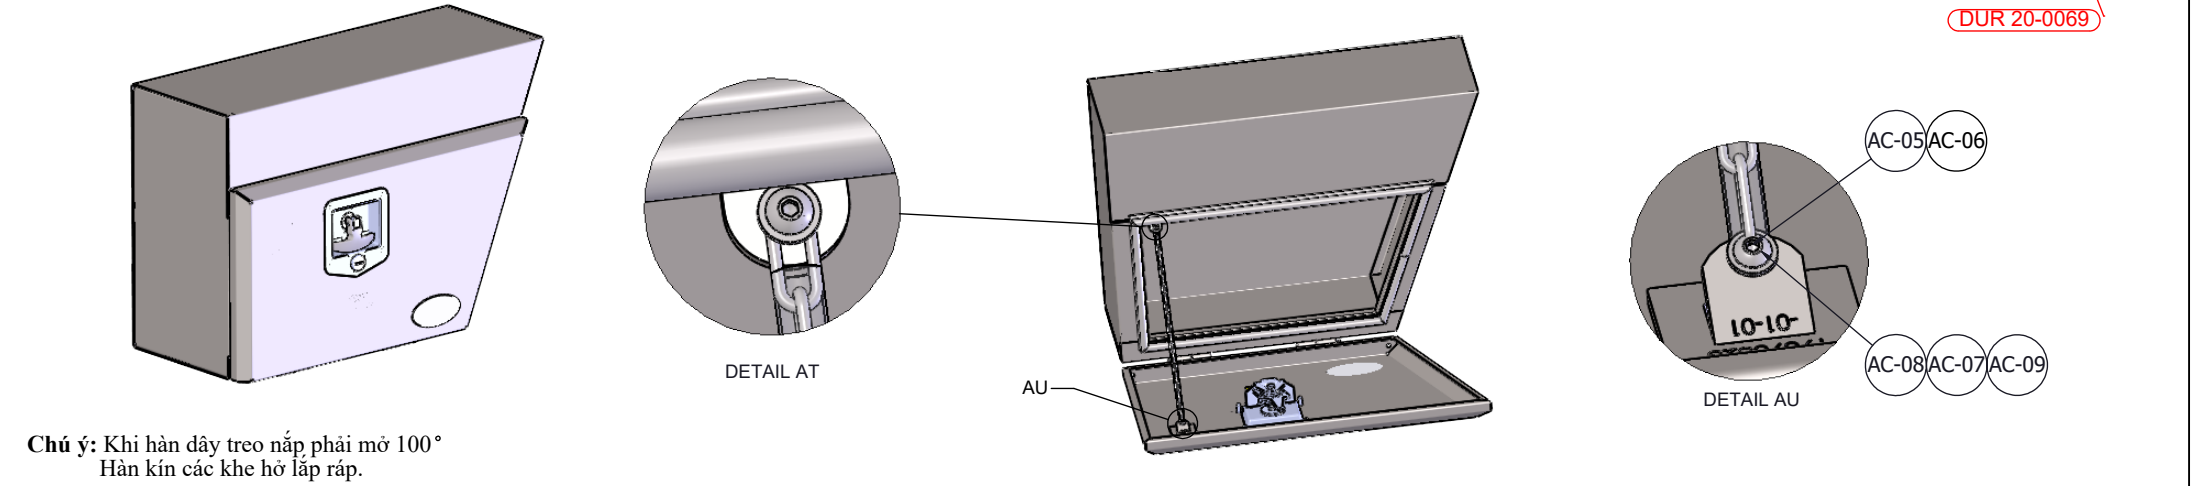

MO:	Batch: 1 of 1	Product Description: Reid & Twiname Beveled Lid Wheel Arch Steel Tool Box 314 LID L600top-440botxH400xD250 LH		0	14-05-2021	As Per Dur 20-0069 [Add adhesive info for stainless steel label]					V2885			
Quantity Batch:		Product Code: 001-001-0009LHNZ												
Contract #:		Dwg Description: ASSEMBLY 1 OF 2		PRO REV.	DATE	ALTERATION					AUTH.			
Contract Ref:		Client: REID & TWINAME	Client Code: TBPCWALH	Selection	0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	>4000-8000	Angle Tolerance
Approved By:		Client Dwg Ref: TBPCWALH	Client Rev: 0		±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	±0.8	-	±1°
Date:					±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	
Signature by:	Date:	Fisnish: Black /Smooth/Matt 25+-5/RAL 9005			±0.15	±0.2	±0.5	±0.8	±1.2	±2	±3	±4	±5	
					NOTE: All dimensions in mm (unless noted otherwise)						W : (kg)		Sheet 2 of 3	

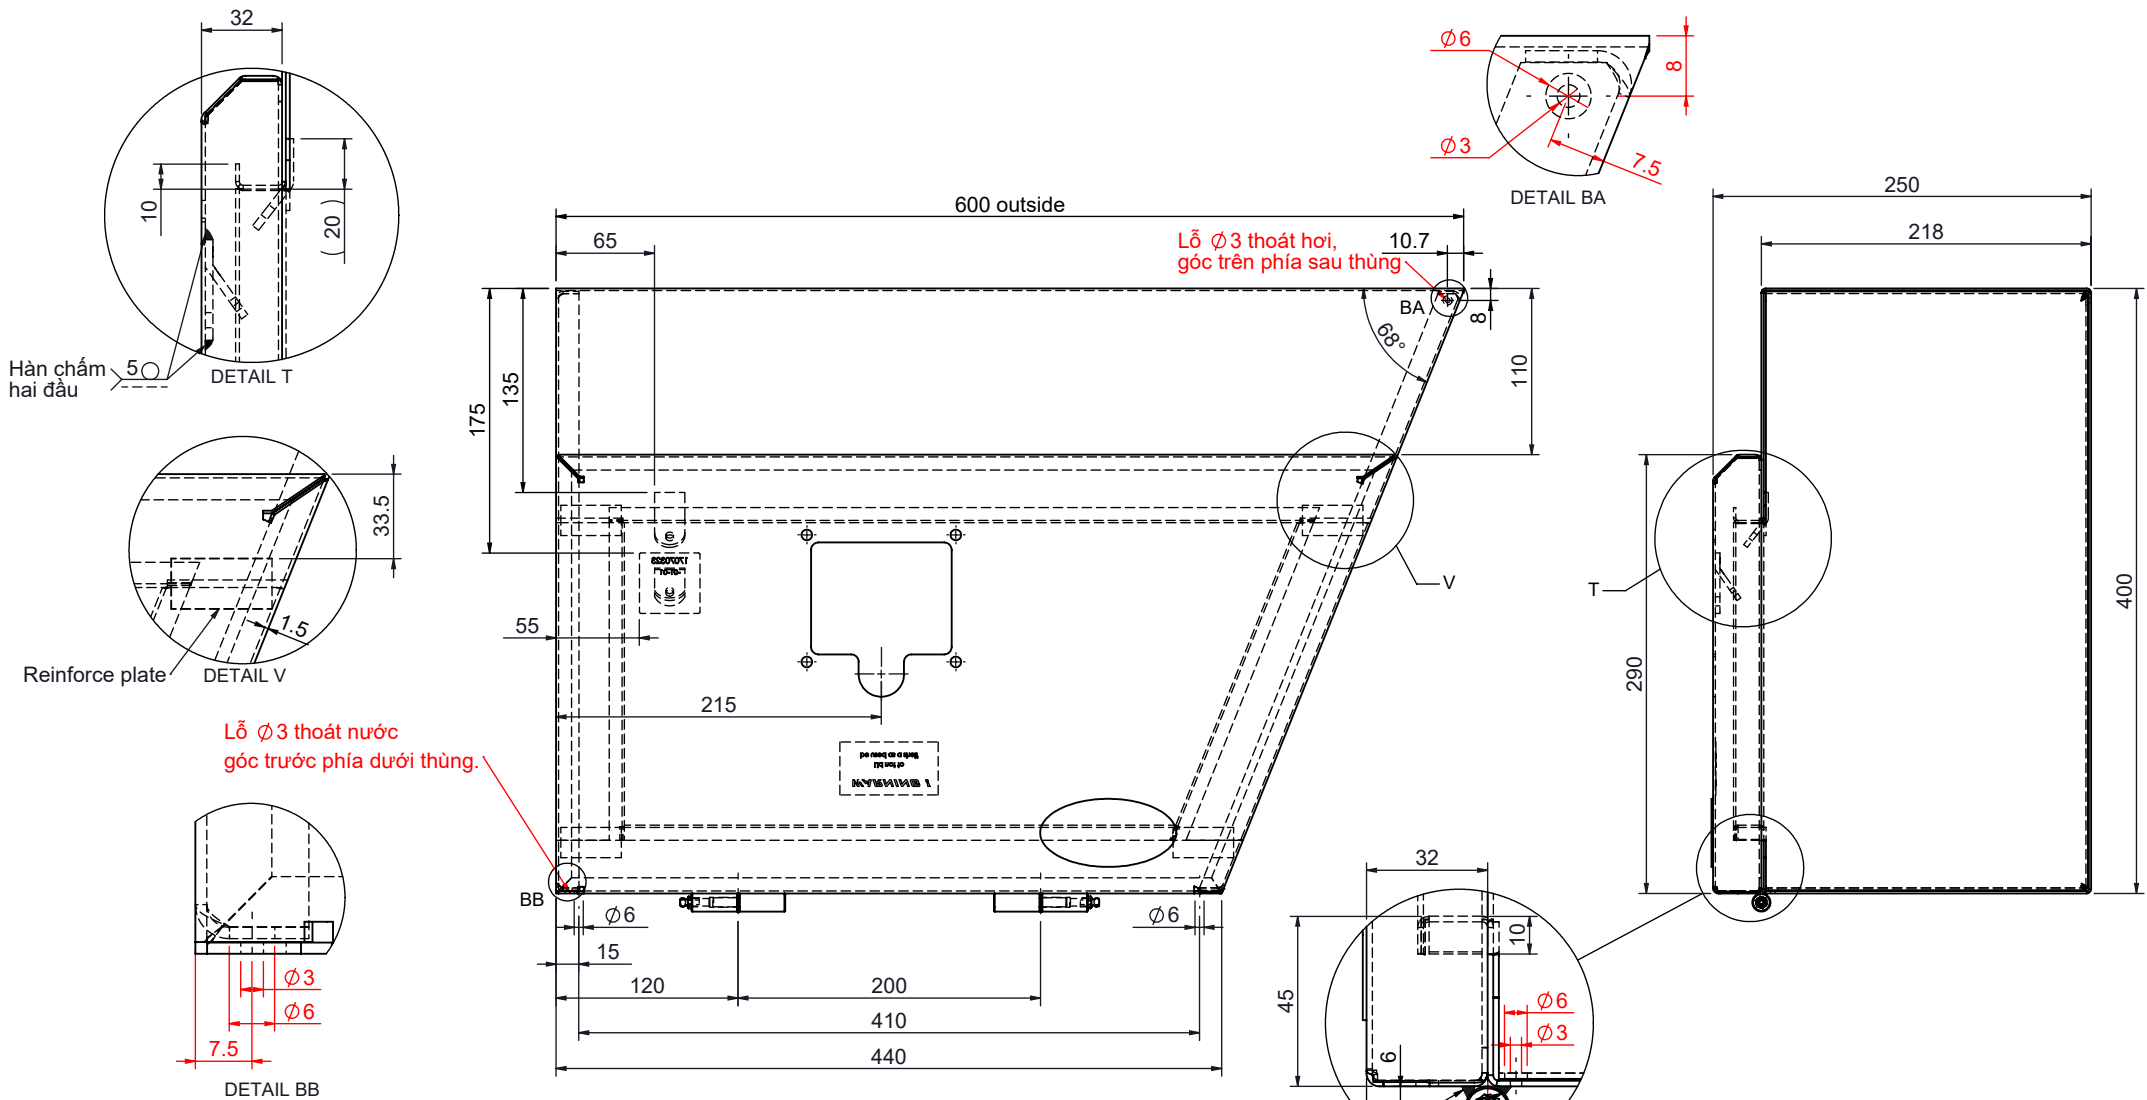

Chú ý: - Khi hàn dây treo nắp phải mở 100°
- Hàn kín các khe hở lắp ráp.
- Kiểm tra bề mặt, bavia 100%.
- Kiểm tra mối hàn 100%.
- Kiểm tra vị trí, hướng của bản lề, bracket gắn dây xích 100%.

MO:	Batch: 1 of 1	Product Description: Reid & Twiname Beveled Lid Wheel Arch Steel Tool Box 314 LID L600top-440botxH400xD250 LH				0	14-05-2021	As Per Dur 20-0069 [Add adhesive info for stainless steel label]					V2885				
Quantity Batch:		Product Code: 001-001-0009LHNZ															
Contract #:		Dwg Description: ASSEMBLY 2 OF 2				PRO REV.	DATE			ALTERATION				AUTH.			
Contract Ref:		Client: REID & TWINAME		Client Code: TBPCWALH		Selection	0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	>4000-8000	Angle Tolerance	
Approved By:		Date:	Client Dwg Ref: TBPCWALH		Client Rev: 0		±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	±0.8	-	±1 °	
Signature by:		Date:	Fisnish: Black /Smooth/Matt 25+-5/RAL 9005					±0.15	±0.2	±0.5	±0.8	±1.2	±2	±3	±4		±5
							NOTE: All dimensions in mm (unless noted otherwise)					W : 13.02 (kg)		Sheet 3 of 3			